

## FEATURES & BENEFITS

- High strength galvanized steel hardware providing superior strength and corrosion resistance
- Highest quality UV stabilized seamless one-piece construction with uniform wall thickness ensures a robust life expectancy to 15+ years
- Each of the four 1,085L hull sections can be replaced in the event of damage to a hull section
- Four separate hull compartments ensures sustained buoyancy even with one catastrophically damaged hull
- Large diameter load plates bolted to both ends of the shell for maximum load disbursement
- Refined EPS foaming process with over 20 years of experience significantly reduces risk of sinking and environmental contamination



## GENERAL SPECIFICATIONS

Diameter	59" / 1500 mm
Wall Thickness	¼" / 6 mm
Height	115" / 2921 mm
Air Weight	860 lbs / 390 kg
Total Volume	1147 US Gal / 4340 L
Total Buoyancy	8819 lbs / 4000 kg
Mooring & Lifting Eye Diameter	88.9 mm / 3.5"

## MATERIAL SPECIFICATIONS

### POLYETHYLENE

Virgin PE material with a UV 15 inhibitor

### COLOUR

Comes in standard yellow

### EPS FOAM


1 lb/ft.<sup>3</sup> / 16 kg/m<sup>3</sup> density closed cell EPS

### STAINLESS STEEL

Inserts are made with a minimum rating of 18-8 stainless steel

### GALVANIZED STEEL

Internal components are hot-dipped galvanized

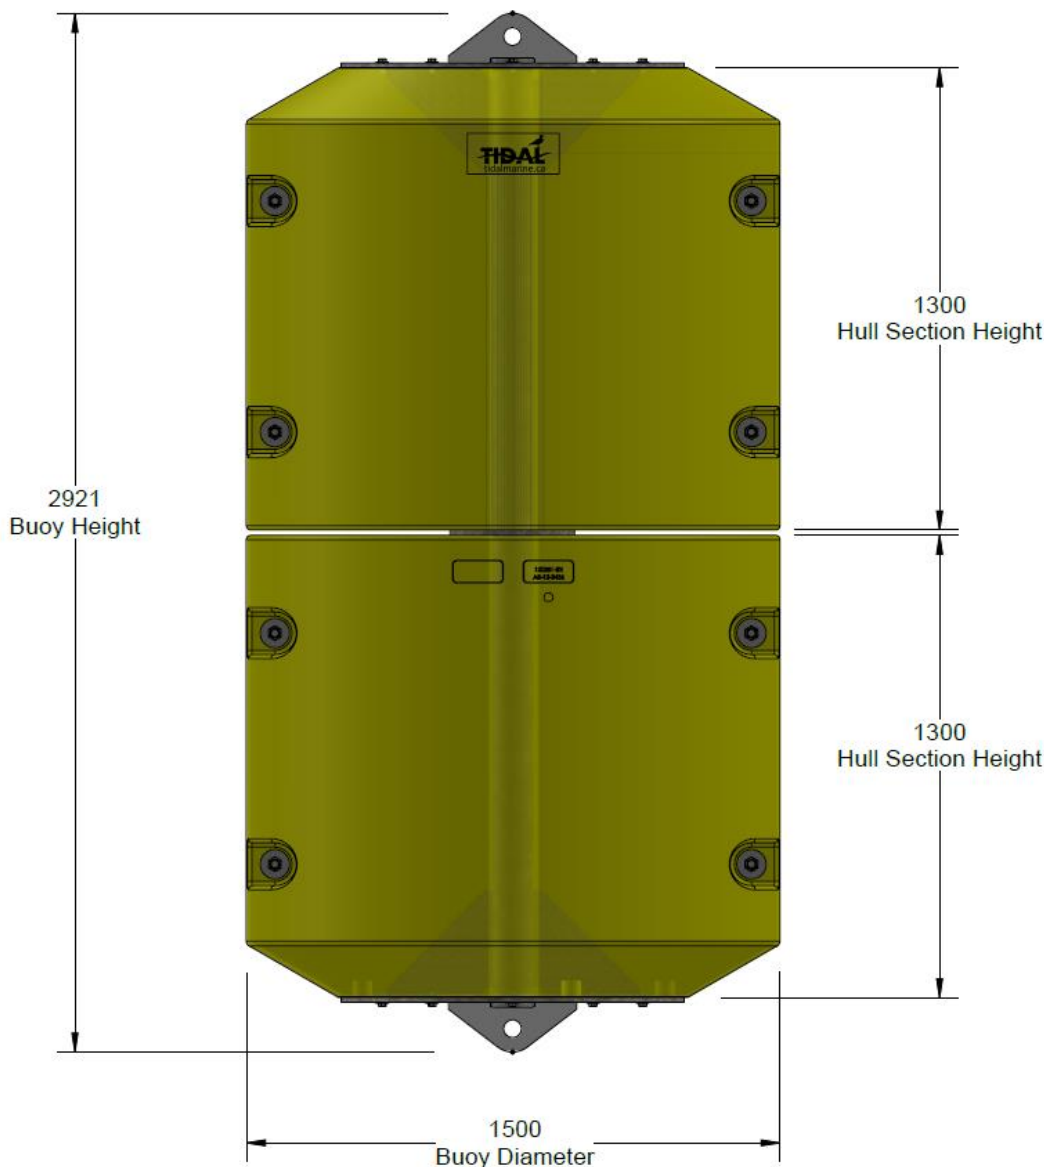

## AVAILABLE OPTIONS

- Reflective banding
- Custom colours
- Self contained lantern
- Monitoring & tracking systems